# MEMBRAPOR SPECIFICATION SHEET

## H2S/CG-100







### Hydrogen Sulfide Gas Sensor in Compact Housing

#### **MEASUREMENT**

Operation Principle	3-Electrode Electrochemical	
Nominal Range	0 – 100 ppm	
Maximum Overload	200 ppm	
Inboard Filter	_	
Output Signal	550 ± 110 nA/ppm	
Resolution (Electronics dependent)	< 0.1 ppm	
T90 Response Time	< 35 sec	
Typical Baseline Range (pure air, 20°C)	-1 ppm to 1 ppm	
Maximum Zero Shift (+20°C to +40°C)	0.2 ppm	
Repeatability	< 2 % of signal	
Output Linearity	Linear	
Gain	_	

#### **ELECTRICAL**

Rec. Load Resistor	10 Ohm
Bias (V_Sens-V_Ref)	+0 mV
Conformity to RoHS directive	RoHS Compliance

#### **ENVIRONMENTAL**


Relative Humidity Range	15 % to 90 % R.H. non- condensing
Temperature Range	-20 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	none

#### **LIFETIME**

Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	< 2 % per month
Filter Life	_
Storage Life	6 months in container
Olorage Life	6 months in container
Rec. Storage Temperature	5 °C – 20 °C

Performance data conditions: 20 °C, 50% RH, 1013 mbar

#### **Compact-Size Outline Dimensions**

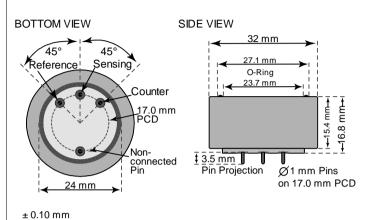

#### **MECHANICAL**

Weight	13 g
Position Sensitivity	None

#### **APPLICATIONS**

**Discontinuous Measurement** Biogas Analyzer Safety and Environmental Control

#### **CROSS-SENSITIVITY DATA**

The table below does not claim to be complete. Interfering gases should not be used for calibration.

Interfering Gas	Conc.	Reading
	ppm	ppm
CO	100	1
SO <sub>2</sub>	50	8
CO SO <sub>2</sub> NO	35	2
$NO_2$	5	-1
HCI	20	0
$H_2$	1000	2
Methanol	300	0

REV.: 10/2017 Page 1 of 1

Phone: +41 43 311 72 00 MEMBRAPOR AG Fax: +41 43 311 72 01 Birkenweg 2 Email: info@membrapor.ch CH-8304 Wallisellen www.membrapor.ch

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.