




# **CO-BF Carbon Monoxide Sensor**



### Figure 1 CO-BF Schematic Diagram

**PATENTED** 

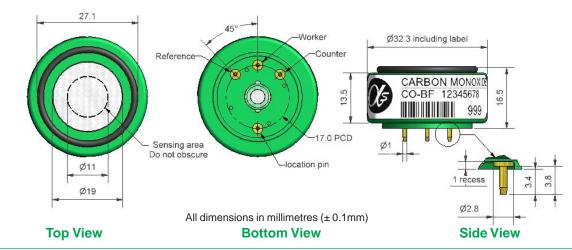

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas range	nA/ppm in 400ppm CO t <sub>90</sub> (s) from zero to 400ppm CO ppm equivalent in zero air RMS noise (ppm equivalent) ppm limit of performance warranty ppm CO error at full scale, linear at zero, 400ppm CC maximum ppm for stable response to gas pulse		80 to 120 < 30 < ± 2 < 0.3 1,000 0 < ± 15 10,000
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)		< 0.2 < 3 () > 24
ENVIRONMENTA @ -20°C/output @	Sensitivity @ -20°C  output @ 20°C) @ 400ppm CO  Sensitivity @ 50°C % (output @ 50°C/output @ 20°C) @ 400ppm CO  Zero @ -20°C ppm equivalent change from 20°C  Zero @ 50°C ppm equivalent change from 20°C			% (output 65 to 85 105 to 115 ± 2 < 3
CROSS SENSITIVITY	Filter capacity Filter capacity Filter capacity Filter capacity Filter capacity SO <sub>2</sub> sensitivity NO sensitivity NO <sub>2</sub> sensitivity Cl <sub>2</sub> sensitivity H <sub>2</sub> sensitivity C <sub>2</sub> H <sub>4</sub> sensitivity H <sub>2</sub> S sensitivity NH <sub>3</sub> sensitivity	ppm-hrs ppm-hrs ppm-hrs ppm-hrs ppm-hrs % measured gas @ 20ppm % measured gas @ 50ppm % measured gas @ 10ppm % measured gas @ 10ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 20ppm % measured gas @ 20ppm	$\begin{array}{c} {\rm H_2S} \\ {\rm NO} \\ {\rm NO_2} \\ {\rm SO_2} \\ {\rm SO_2} \\ {\rm NO} \\ {\rm NO_2} \\ {\rm Cl_2} \\ {\rm H_2at20^oC} \\ {\rm C_2H_4} \\ {\rm H_2S} \\ {\rm NH_3} \end{array}$	160,000 120,000 120,000 160,000 < 0.1 < 25 < 0.1 < 65 < 65 < 0.1 < 0.1
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period Weight	°C kPa % rh continuous months @ 3 to 20°C (stored in	n sealed pot)	-30 to 50 80 to 120 15 to 90 6 < 13

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.





## **CO-BF Performance Data**

#### **Figure 2 Sensitivity Temperature Dependence**


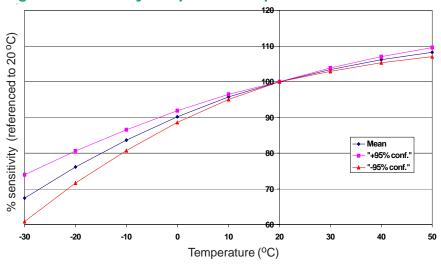


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and  $\pm$  95% confidence intervals are shown.

### Figure 3 Long Term Stability

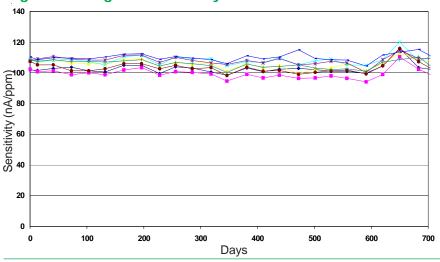

When sensors are tested monthly, stability shows that they can be used in fixed sites, where maintenance and recalibration costs are critical.

Figure 4 Response to Exposure to 1% CO

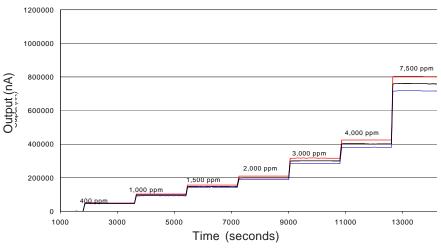


Figure 4 shows the response to step changes in CO concentrations from zero to 1% by volume.

This data is taken from a typical batch of sensors. The mean and ± 95% confidence intervals are shown.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it

(©ALPHASENSE LTD) Doc. Ref. TDS/COBF/Issue 12