MEMBRAPOR SPECIFICATION SHEET







Formaldehyde Gas Sensor in Mini Housing

MEASUREMENT

Operation Principle	3-Electrode Electrochemical
Nominal Range	0 – 1'000 ppm
Maximum Overload	2'000 ppm
Inboard Filter	none
Output Signal	60 ± 15 nA/ppm
Resolution (Electronics dependent)	< 1 ppm
T60 Response Time	< 40 sec
Typical Baseline Range (pure air, 20°C)	N.D.
Maximum Zero Shift (+20°C to +40°C)	20 ppm
Repeatability	< 2 % of signal
Output Linearity	Linear
Gain	_

ELECTRICAL

Rec. Load Resistor	10 Ohm
Bias Voltage	not recommended
Conformity to RoHS directive	RoHS Compliance

ENVIRONMENTAL

Relative Humidity Range	15 % to 90 % R.H. non- condensing
Temperature Range	-20 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	Abrupt changes in rel. humidity causes a short


LIFETIME

Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	< 2 % per month
Filter Life	-
Storage Life	6 months in container
Rec. Storage Temperature	5 °C – 20 °C
Warranty Period	12 months from date of dispatch

IMPORTANT NOTE

Performance data conditions: 20 °C, 50% RH, 1013 mbar

Miniature-Size Outline Dimensions

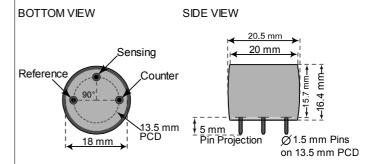

± 0.10 mm

MECHANICAL

Weight	5.5 g
Position Sensitivity	None

APPLICATIONS

Continuous Air Quality Monitoring Safety and Environmental Control For Portable Devices

CROSS-SENSITIVITY DATA

REV.: 10/2016 Page 1 of 1

Phone: +41 43 311 72 00

Fax: +41 43 311 72 01

Email: info@membrapor.ch

WEMBRAPOR AG

Birkenweg 2

CH-8304 Wallisellen

www.membrapor.ch

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.