

SPECIFICATION SHEET FOR H₂S SENSOR TYPE H2S/S-50



PERFORMANCE CHARACTERISTICS

| | |
|---|----------------------------------|
| Nominal Range | 0 – 50 ppm |
| Maximum Overload | 500 ppm |
| Expected Operation Life | 2 years in air |
| Output Signal | 1700 ± 300 nA/ppm |
| Resolution | 0,05 ppm |
| Temperature Range | - 20 °C to 50 °C |
| Pressure Range | Atmospheric ¹⁾ |
| Pressure Coefficient | No data |
| T ₉₀ Response Time | < 35 sec |
| Relative Humidity Range | 15 % to 90 % R.H. non-condensing |
| Typical Baseline Range (pure air, 20°C) | < 0,3 ppm |
| Maximum Zero Shift (+20°C to +40°C) | 0,1 ppm |
| Expected Long Term Output Drift | < 2 % signal loss/month |
| Recommended Load Resistor | 10 Ohm |
| Bias Voltage | Not recommended |
| Repeatability | < 2 % of signal |
| Output Linearity | Linear |

PHYSICAL CHARACTERISTICS

| | |
|---------------------------------|---------------------------------|
| Weight | ~ 32 g |
| Position Sensitivity | None |
| Storage Life | Six months in container |
| Recommended Storage Temperature | 5 °C – 20 °C |
| Warranty Period | 12 months from date of dispatch |

Standard-Size Outline Dimensions

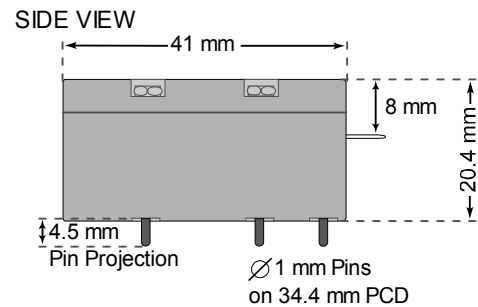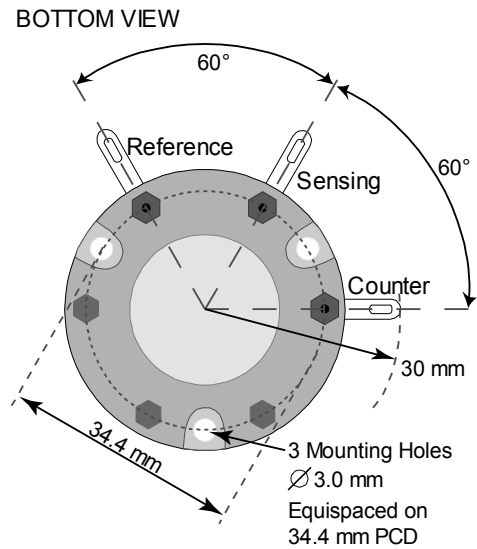

CROSS-SENSITIVITY DATA

| Interfering Gas | Concentration | Reading |
|-----------------|---------------|-----------|
| CO | 100 ppm | < 1 ppm |
| SO ₂ | 50 ppm | < 8 ppm |
| NO | 35 ppm | < 2 ppm |
| NO ₂ | 5 ppm | ~ - 1 ppm |
| HCl | 20 ppm | 0 ppm |
| H ₂ | | < 1 ppm |

Performance data conditions:
20 °C, 50% RH and 1013 mbar

APPLICATIONS

Continuous Air Quality Monitoring
Safety and Environmental Control


The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it. The data is given for guidance only. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

SPECIFICATION SHEET FOR HIGH SENSITIVE H₂S SENSOR TYPE H2S/S-50

TEMPERATURE DEPENDENCE

The output of an electrochemical sensor varies with temperature. The graphs below show the variation in output with temperature for this type of sensor. The results are shown in the graphs as a mean for a batch of sensors, along with confidence intervals corresponding to ± 3 times the standard deviation. The sensitivity dependence is expressed as a percentage of the signal at 20 °C. The shift in baseline is shown in ppm referenced to 20 °C.

Sensitivity Temperature Dependence

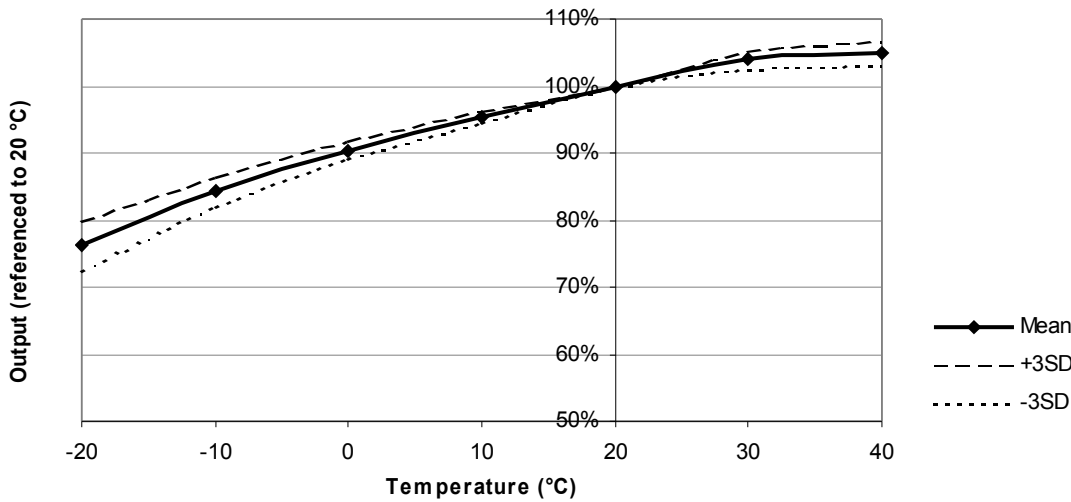

Baseline Temperature Dependence

