




● NEMOTO SENSORTECH DIVISION
 ● NANO & CYBERTECH DIVISION




TECHNICAL INFORMATION SHEET: NEMOTO NP-17SL Single Header Pellistor Gas Sensor

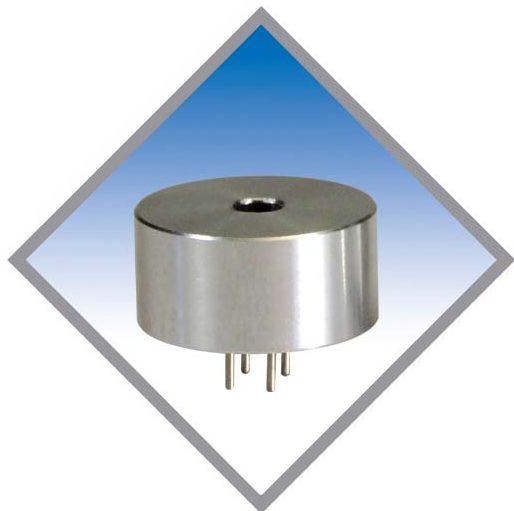

Specifications:

Recommended Voltage:	2.0V +/- 0.1V
Current Drawn:	170 +/- 20mA
Zero Offset:	0mV +/- 30mV
Minimum Sensitivity:	20mV/% CH ₄ /Air
Standard Range:	0-100% LEL
Accuracy:	+/- 1%LEL(CH ₄)
Maximum Long Term Drift:	
Span:	< +/- 5% LEL/ 3 Months
Zero:	< +/- 1/2 mV/Month
Response Time:	T ₅₀ : 3 sec T ₉₀ : 8 sec

Recommended Circuit:

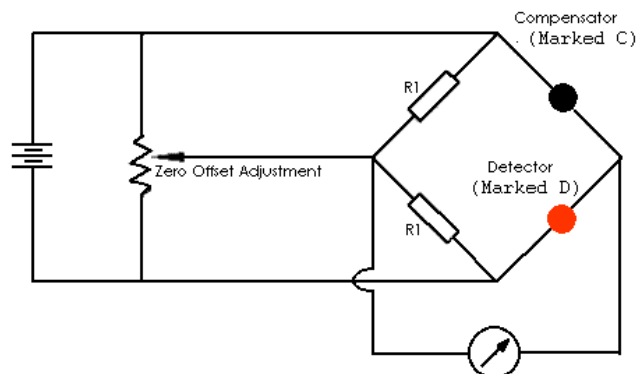

General Description

The Nemoto NP-17SL is a catalytic (pellistor) type flammable gas sensor supplied as a matched pair of pellistor elements mounted on a single header and protected by a stainless steel enclosure which has been carefully designed to optimise the sensor's performance.

The sensor detects and measures the presence of flammable gases and vapours in air, in the range 0-100% of the Lower Explosive Limit (LEL) of the gas or vapour being measured. Designed as an improved version of the single header NP-17S device, the NP-17SL exhibits very similar performance to the popular twin header NP-17, with improved poison resistance and linearity over the NP-17S.

The NP-17SL exhibits excellent long term zero and sensitivity stability and a high level of resistance to catalytic poisons. The highly automated manufacturing procedure employed by Nemoto results in a repeatable reliable sensor which, unlike similar devices, requires no trimming resistor to enable the detector to be matched with a compensator.

Note: The value R1 is arbitrary, since the function of R1 is to balance the bridge. 1KΩ is suggested.

Temperature Range:	-40°C to +70°C
Temperature Drift:	(-20°C to +70°C)
Zero:	< +/- 2%LEL
Humidity:	0-100%RH, non-condensing
Humidity Response:	+/- 2%LEL
Linearity:	Linear to +/- 5% LEL At 100%LEL Gas


Test data on drift, poisoning, temperature performance, linearity will be available on the Characterisation Document np-17slm-CD.

Nemoto has a policy of continuous development and improvement of its products. As such the specification for the device outlined in the data sheet may be changed without notice.

ds-np17sl.doc, issue 1, May 2007



Sensor Structure and Dimensions:

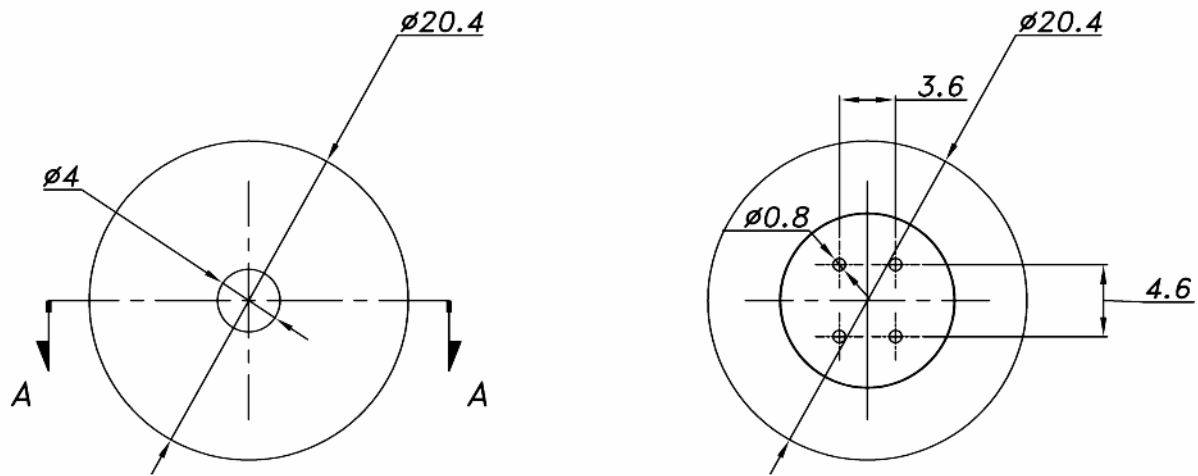

*Cross section
A-A*

