MEMBRAPOR SPECIFICATION SHEET

NO2/C-20







Nitrogen Dioxide Gas Sensor in Compact Housing

	45U	KE		N I
One	ratio	n Pi	rincir	ole

Operation Principle	3-Electrode Electrochemical	
Nominal Range	0 – 20 ppm	
Maximum Overload	200 ppm	
Inboard Filter		
Output Signal	-1100 ± 300 nA/ppm	
Resolution (Electronics dependent)	< 0.1 ppm	
T90 Response Time	< 60 sec	
Typical Baseline Range (pure air, 20°C)	< 0.1 ppm	
Maximum Zero Shift (+20°C to +40°C)	-0.2 ppm	
Repeatability	< 2 % of signal	
Output Linearity	Linear	

ELECTRICAL

Gain

Rec. Load Resistor	10 – 33 Ohm
Bias (V_Sens-V_Ref)	not required
Conformity to RoHS directive	RoHS Compliance

ENVIRONMENTAL


Relative Humidity Range	15 % to 90 % R.H. non- condensing	
Temperature Range	-40 °C to 50 °C	
Pressure Range	Atmospheric ± 10%	
Pressure Coefficient	N.D.	
Humidity Effect	none	

LIFETIME

Expected Operation Life	2 years in air	
Expected Long Term Output Drift in air	< 2 % per month	
Filter Life	_	
Storage Life	6 months in container	
	o montro in containo.	
Rec. Storage Temperature	5 °C – 20 °C	

Performance data conditions: 20 °C, 50% RH, 1013 mbar

Compact-Size Outline Dimensions

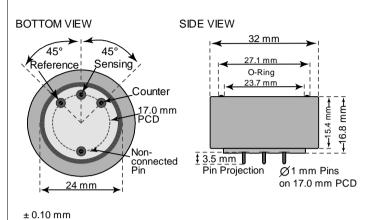

MECHANICAL

Weight	13 g
Position Sensitivity	None

APPLICATIONS

Continuous Air Quality Monitoring Emission Monitoring

CROSS-SENSITIVITY DATA

The table below does not claim to be complete. Interfering gases should not be used for calibration.

Interfering Gas	Conc.	Reading
	ppm	ppm
O_3	1	0.5
SO_2	5	0
O ₃ SO ₂ CO	100	0
H_2	100	0
H_2 C_2H_4	100	0
Cl ₂	20	15
NO	35	0 1
CH ₂ O	7	0
HCI	20	0
NH ₃	80	0
H ₂ S	20	< -20

¹⁾ NO readily forms NO2 in the presence of O2

REV.: 03/2018 Page 1 of 3

Phone: +41 43 311 72 00

Fax: +41 43 311 72 01

Email: info@membrapor.ch

www.membrapor.ch

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

MEMBRAPOR SPECIFICATION SHEET

NO2/C-20







Nitrogen Dioxide Gas Sensor in Compact Housing

TEMPERATURE DEPENDENCE

The output of an electrochemical sensor varies with temperature. The graphs below show the variation in output with temperature for this type of sensor. The results are shown in the graphs as a mean for a batch of sensors. The sensitivity dependence is expressed as a percentage of the signal at 20 °C. The shift in baseline is shown in ppm referenced to 20 °C and a relative humidity of 50%.

Please note:

It is highly recommended to acquire the temperature dependence curves with the whole instrument. The sampling system, the humidity, the electronics, the interaction between the electronics and the sensor, all have a significant impact on the temperature dependence of the final measurement reading.

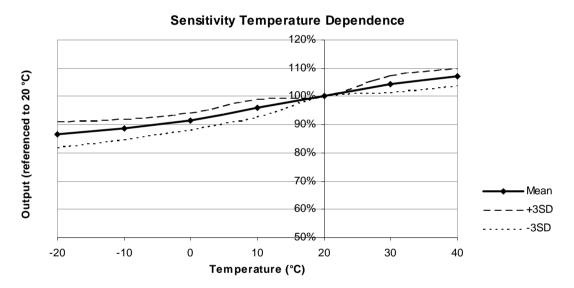


Figure 1: Sensitivity dependence expressed as a percentage of the signal at 20 °C. The result is shown along with confidence intervals corresponding to ±3 times the standard deviation.

REV.: 03/2018 Page 2 of 3

Phone: +41 43 311 72 00

Fax: +41 43 311 72 01

Email: info@membrapor.ch

WEMBRAPOR AG

Birkenweg 2

CH-8304 Wallisellen

www.membrapor.ch

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

MEMBRAPOR SPECIFICATION SHEET

NO2/C-20

o we see





Nitrogen Dioxide Gas Sensor in Compact Housing

TEMPERATURE DEPENDENCE

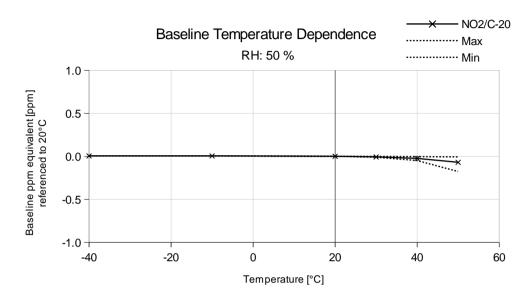


Figure 2: The shift in baseline shown in ppm referenced to 20 °C and a relative humidity of 50%.

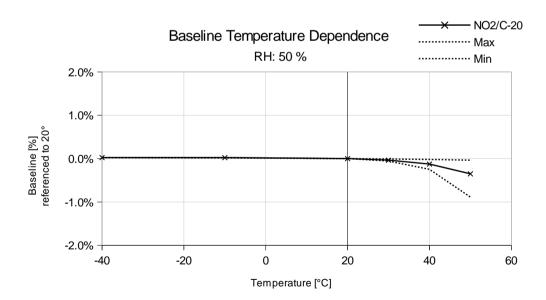


Figure 3: The shift in baseline expressed as percentage of the measurement range referenced to 20 °C and a R.H. of 50%.

REV.: 03/2018 Page 3 of 3

Phone: +41 43 311 72 00
Fax: +41 43 311 72 01
Email: info@membrapor.ch

www.membrapor.ch

MEMBRAPOR AG Birkenweg 2

CH-8304 Wallisellen

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.